

Semi Pro Line Catalog





Content

Soldering Stations & Accessories	4 - 5
Smoke Absorber	6
Soldering Irons	6 – 9
Soldering Tips	10 - 11
Therma-Boost	12
Soldering Guns & Tips	13 - 14
Cordless Soldering Irons & Accessories	15 - 18
Hobbykits & Accessories	19 - 20
Profikit & Accessories	20 - 21
Solder Accessories	22 – 27







Soldering Stations & Accessories

Temperature Controlled Soldering Stations, Digital Stations and Spare Parts



tips: see page 10

Temperature Controlled Soldering Stations

- The temperature range can be controlled between 200°C and 450°C. The WHS40 soldering station from Weller rules out the risk of temperature shocks which can occur with conventional soldering bits.
- Desired temperatures can be set precisely in such a way that you no longer have to worry about overheating sensitive areas.
- Consist of power unit, soldering iron with nickel-plated tip 2,0 mm and support.



Order No.	Model	Watts	Volts	Hz	Weight g	Shelf Pack
005 68 066 99	WHS40	40	230	50	1460	1
005 68 063 99	WHS40 (GB)	40	230	50	1488	1



tips: see page 10

Temperature Controlled Digital Soldering Stations

- The electronically controlled soldering station WHS40D operates with a temperature range of $150^{\circ}C - 450^{\circ}C$.
- The precise soldering tip temperature shows on the digital read-out (pre-set and real value).
- This soldering station is suitable for delicate soldering tasks on temperature sensitive components.
- LED to monitor the heater is integrated in the display.
- The temperature adjusts via buttons.
- Consist of power unit, soldering iron with "Longlife" tip 2,0 mm and support.



Order No.	Model	Watts	Volts	Hz	Weight g	Shelf Pack
005 68 286 99	WHS40D	40	230	50	1460	1
005 68 283 99	WHS40D (GB)	40	230	50	1490	1

Spare Parts for Soldering Stations WHS40 and WHS40D

Order No.	Model	Description	Weight g	Shelf Pack
005 68 106 99	WH40	Soldering Iron with "Longlife" tip 2,0 mm	116	1
Order No.		Description	Weight g	Shelf Pack
Order No. 005 87 437 08		Description Sponge (2 pcs.)	Weight g 5	Shelf Pack

Soldering Stations & Accessories

Temperature Controlled Soldering Stations, Digital Stations and Spare Parts



tips: see page 11

Order No.	Model
005 68 306 99	WHS 50
consists of:	
	P 81
	LR 21
	KH 20



tips: see page 11

Order No.	Model	
005 68 296 99	WHS 80	
consists of:		
	P 81	
	LR 82	
	KH 27	

Weller

Soldering Station analog 80 W, 230 V with Soldering Iron LR 21, 50 W

- Analog controlled electronic for soldering tools up to 80 W.
- Temperature range 150°C 450°C.
- Temperature control via rotary potentiometer.
- Protection class 1.
- Automatic tool recognition.
- Dimensions: 166 x 115 x 101 mm (L x W x H).



Descripti

Control unit Soldering iron 50 W, 24 V with soldering tip ET B Safety rest

Soldering Station analog 80 W, 230 V with Soldering Iron LR 82, 80 W

- Analog controlled electronic for soldering tools up to 80 W.
- Temperature range 150°C 450°C.
- Temperature control via rotary potentiometer.
- Protection class 1.
- Automatic tool recognition.
- Dimensions: 166 x 115 x 101 mm (L x W x H).



Description

Control unit Soldering iron 80 W, 24 V with soldering tip HT 2 Safety rest

Smoke Absorber

Smoke Absorber Compact Remove much of the noxoius solder flux fume from your workplace benchtop. Use limited space. Adjustable angle of the hood Carbon-activated filters. ESD safe. Description Order No. WSA350EU Smoke Absorber Order No. Description WSA350F Replacement Carbon-activated filter (3pcs)

Soldering Irons

Soldering Irons Series Mini 2000



- Specifically designed for the electronic hobbyist.
- Lightweight iron, perfectly balanced, with an ergonomically designed handle. Available in 12, 15 and 20 Watts.
- Type WM12 fitted with nickel-plated tip, width 2,4 mm.
- Type 2012 fitted with nickel-plated tip, width 0,65 mm.
- Type WM15L and WM15L12 fitted with iron-plated "Longlife" tip, width 2,0 mm.
- Type 2015 fitted with nickel-plated tip, width 2,0 mm.
- Type WM20 and 2020 fitted with nickel-plated tip, width 3,5 mm.
- WM20L fitted with iron-plated "Longlife" tip, width 3,5 mm.

RoHS compliant		C	e
-------------------	--	---	---

Order No.	Model	Watts	Volts	Hz	Weight g	Shelf Pack
005 68 111 99	WM12	12	230	50	215	6
005 68 112 99	2012 (GB)	12	230	50	195	6
005 68 131 99	WM15L	15	230	50	215	6
005 68 142 99	2015 (GB)	15	230	50	198	6
005 68 151 99	WM20	20	230	50	220	6
005 68 161 99	WM20L	20	230	50	220	6
005 68 152 99	2020 (GB)	20	230	50	200	6

Soldering Irons

Uncontrolled Line Voltage Soldering Irons





Order No.	Model
005 64 005 99	SPI 16
005 64 073 99	SPI 16 UK





Order No.	Model
005 64 021 99	SPI 27
005 64 074 99	SPI 27 UK



Order No.	Model
005 64 037 99	SPI 41
005 64 075 99	SPI 41 UK





Uncontrolled Line Voltage Soldering Irons, 15 Watts

- Robust heating elements of special steel between natural mica-leaves, embedded in cast ceramics and first-class material make the Weller SPI irons outstanding in technology and life-time.
- The SPI irons come with plated and oxidation prevented Weller "Longlife" tips.

Description

Line voltage soldering iron 15 W, 230 V, unregulated complete with soldering tip 1,2 mm and holder Heating up time ~180 sec., tip temperature ~360°C

Uncontrolled Line Voltage Soldering Irons, 25 Watts

- Robust heating elements of special steel between natural mica-leaves, embedded in cast ceramics and first-class material make the Weller SPI irons outstanding in technology and life-time.
- The SPI irons come with plated and oxidation prevented Weller "Longlife" tips.

Description

Line voltage soldering iron 25 W, 230 V, unregulated

complete with soldering tip 1,2 mm and holder Heating up time ~180 sec., tip temperature ~410°C

Uncontrolled Line Voltage Soldering Irons, 40 Watts

- Robust heating elements of special steel between natural mica-leaves, embedded in cast ceramics and first-class material make the Weller SPI irons outstanding in technology and life-time.
- The SPI irons come with plated and oxidation prevented Weller "Longlife" tips.

Description

Line voltage soldering iron 40 W, 230 V, unregulated complete with soldering tip 2,0 mm and holder Heating up time ~180 sec., tip temperature ~450°C

Uncontrolled Line Voltage Soldering Irons, 80 Watts

- Robust heating elements of special steel between natural mica-leaves, embedded in cast ceramics and first-class material make the Weller SPI irons outstanding in technology and life-time.
- The SPI irons come with plated and oxidation prevented Weller "Longlife" tips.

Description

Line voltage soldering iron 80 W, 230 V, unregulated complete with soldering tip 5 mm and holder Heating up time ~180 sec.

Soldering Irons

Soldering Irons SP Series



RoHS compliant

Order No./ Model	Watts	Volts	Hz	Weight g
SP15LEU	15	230	50	338
SP15LUK	15	230	50	350



RoHS compliant

RoHS compliant

General Duty Irons, 25 Watts

Fine Duty Irons, 15 Watts

repairs and hobby work.

• ON / OFF indicator light.

 All-purpose iron for general electrical repairs in the home and hobby workshop.

For fine duty work such as in home electronics, light duty electrical

Shelf Pack

Fitted with straight tip, nickel-plated 2,0 mm (type S5).

- Fitted with straight tip nickel-plated 0,8 mm (type MT1).
- ON / OFF indicator light.

Order No./ Model	Watts	Volts	Hz	Weight g	Shelf Pack
SP25LEU	25	230	50	369	6
SP25LUK	25	230	50	380	

Soldering Irons

Soldering Irons SI Series



Order No.	Model	Watts	Volts
005 68 076 99	SI120	120	230
005 18 077 99	SI120 (GB)	120	230
005 68 086 99	SI175	175	230
005 18 087 99	SI175 (GB)	175	230
005 68 096 99	SI251	200	230



ᢙ€

Medium Duty Irons, 40 Watts

- Medium duty iron for most general soldering repairs where a little more power is required.
- Fitted with straight tip, nickel-plated 6,3 mm (type MT10).
- ON / OFF indicator light.

Order No./ Model	Watts	Volts	Hz	Weight g	Shelf Pack
SP40LEU	40	230	50	402	6
SP40LUK	40	230	50	412	





Heavy Duty Irons, 80 Watts

- Heavy duty iron for making metal repairs,
- such as battery connections and small metal joining tasks.
- Fitted with straight tip, iron-plated, "Longlife" 9,5 mm
- (type MTG20). ON / OFF indicator light.

Order No./ Model	Watts	Volts	Hz	Weight g	Shelf Pack
SP80LEU	80	230	50	452	6
SP80LUK	80	230	50	462	



Heavy Duty Irons 120, 175 and 200 Watts

- Heavy duty irons for the professional user and light industrial operator.
- For demanding jobs like sheet metal work.
- SI120 fitted with bent tip, nickel-plated 12,5 mm (type 43110)
- S1175 fitted with bent tip, nickel-plated 16,0 mm (type 43111)
- SI251 fitted with bent tip, nickel-plated 20,0 mm (type 43112)



Hz	Weight g	Shelf Pack
50	930	6
50	870	6
50	1030	6
50	970	6
50	1190	6

Soldering Tips

Soldering Tips for WHS40 and WHS40D

Order No.	Model	Packed	Nickel plated	Longlife	Diameter mm	Width mm	Shelf Pack
005 43 210 99	S31	Carded	Х	х	3,5	0,4	6
005 43 211 99	S 32	Carded	х	х	3,5	2,0	6

Soldering Tips for SP + SI + SPI Series

Soldering Tips, Nickel-Plated, Packed on Card

For				Diameter	Width	Shelf
Soldering Iron	Model	Order No.	Description	mm	mm	Pack
SP25L	MT1	005 43 132 99	straight, 3 pcs.	4,5	0,8	6
	MT2	005 43 133 99	straight, 3 pcs.	4,5	4,0	6
SI100 / SI120	S 7	005 43 110 99	bent, 1 pc.	12,5	12,5	6

Soldering Tips, Nickel-Plated, Packed in Polybag

For				Diameter	Width	Shelf
Soldering Iron	Model	Order No.	Description	mm	mm	Pack
SP15L / SI15	43113	005 43 113 99	straight	3,5	2,0	1
SP40L / SI40	43105	005 43 105 00	straight	6,3	6,3	1
SP80L / SI75	43106	005 43 106 29	straight	9,5	9,5	1
SI175	43111	005 43 111 99	bent	16,0	16,0	1
SI251	43112	005 43 112 99	bent	20,0	20,0	1

Soldering Tips, Iron-Plated "Longlife", Packed on Card

For				Diameter	Width	Shelf
Soldering Iron	Model	Order No.	Description	mm	mm	Pack
SI25/SPI27	\$33	005 43 200 99	straight	4,5	2,0	6
	S 34	005 43 201 99	straight	4,5	3,0	6
SP40L / SI40 / SPI41	S36	005 43 220 99	straight	6,3	5,0	6
	\$37	005 43 222 99	bent	6,3	5,0	6
SP80L / SI75 / SPI81	S38	005 43 230 99	straight	9,5	7,0	6
	\$39	005 43 232 99	bent	9,5	7,0	6
	MTG20	005 43 137 99	straight	9,5	9,5	6
SI100 / SI120	S41	005 43 243 99	bent	12,5	12,5	6

Soldering Tips

Soldering Tips for Series Mini 2000




For			Width	Nickel	Iron-Plated	Shelf
Soldering Iron	Model	Order No.	mm	Plated	"Longlife"	Pack
WM12	MTN1	005 43 010 99	0,65/2,4	Х		6
WM20	MTN2	005 43 011 99	2,4/3,5	Х		6
WM12L,WM15L	MTL1	005 43 012 99	2,0		Х	6
WM20L	MTL2	005 43 013 99	3,5		Х	6
2012 (GB)	STT1	005 43 295 99	0,25	Х		6
2015 (GB)	STT2	005 43 296 99	2,0	Х		6
2020 (GB)	STT3	005 43 297 99	3,5	Х		6

Soldering Tips for LR21

Order No.	Model	Description	Width A	Length B	Shelf Pack
005 41 000 99	ET H	Chisel	0,8 mm	0,4 mm	1
005 41 002 99	ET B	Chisel	2,4 mm	0,8 mm	1
005 41 003 99	ET C	Chisel	3,2 mm	0,8 mm	1
005 41 005 99	ET E	Chisel	5,6 mm	1,2 mm	1
005 41 006 99	ET K	Chisel long	1,2 mm	0,4 mm	1
005 41 008 99	ET M	Chisel long	3,2 mm	1,2 mm	1

Soldering Tips for LR82



	нт 2, 3	55s 3.4	<u>•7.4</u> •11.3 SG 83	
Order No.	Model	Description	Width A	Length B
005 40 134 00	SG 83	Round 35°	Ø 7,4 mm	
005 44 261 99	HT 2	Chisel tip	5,2 mm	1,2 mm
005 44 262 99	HT 3	Chisel tip	7,0 mm	1,2 mm

Weller

Therma-Boost

Therma-Boost



Therma-Boost Heat Tool

- Therma-Boost trigger gives you added bursts of power when you need it.
- Red and green lights on the back indicate Standard and Therma-Boost modes.
- Kit includes Therma-Boost heat tool, six multi-use tips, stand and instructions.
- Heats up to working temperature in just 45 seconds.
- Designed for continuous use.
- Ultra light weight, weights just 236 g.
- Tips included: foam cutting, rope cutting, conical, scoring, smoothing,

screwdriver.

Order No.	Model	Watts	Volts	Hz	Weight g	Shelf Pack
TB100EU	TB100EU	30 / 130	230	50	236	5
TB100EU UK	TB100EU UK	30 / 130	230	50	234	5

Soldering Guns

Soldering Guns & Tips



Order No.	Model	Watts	Volts
0050201299	8100UCK	100	230
0050107899	8100UDK (GB)	100	230




Order No.	Model	Watts	Volts
0050206399	9200UC	100	230
0050206499	9200UD (GB)	100	230



Order No.	Model	Watts	Volts
0050500299	05C	250	230

Replacement Parts for Therma-Boost










Scoring

Rope Cutting





Smoothing



Conical

Model	Description	Shelf Pack
TB5TKEU	Tip Set (5 pcs.)	3



Expert Soldering Guns

- Red housing with built-in illumination of the solder-joint and copper soldering tip.
- All purpose gun, that tackles soldering, cutting, sealing and pokerwork with instant heat trough interchangeable tips.
- Operated by fingertip trigger this gun is ready to solder in 7 seconds.
- 8100 UCK contains 8100 Expert soldering gun, coil of multi-purpose solder, cutting tip, smoothing tip and a soldering aid tool.
- UCK: Packaging with inspection window with accessories.

RoHS compliant

Hz	Weight g	Shelf Pack
50	1330	6
50	1400	6

Standard Soldering Guns

Black housing with copper soldering tip.

△€

- Universal soldering gun with instant heat fingertip trigger, ready to solder in 7 seconds.
- Ideal for hobbies, model making and home repairs.

Robust Soldering Guns

50

50

RoHS compliant

- Yellow housing with built-in solder-joint illumination.
- Professional heavy-duty gun with iron-plated Longlife soldering tip.

Weight

1236

1230



Hz	Weight g	Shelf Pack
50	1830	6

Shelf Pack

6

Tips for Soldering Guns

Tips for Expert Soldering Gun 8100 and 9200







Order No.	Model	Description	Shelf Pack
005 40 002 99	7135	Copper soldering tip (2 on card)	12
005 40 001 99	6110	Cutting tip	12
005 40 003 99	6120	Smoothing tip	12


Cordless Soldering Irons & Accessories

Battery Powered Soldering Iron and Tips



Model	Description
BP1EU	"Longlife" soldering tip, conical, 0,4 mm

Tips for Robust Soldering Gun 05





Order No.	Model	Description	Shelf Pack
005 40 005 99	6150	Soldering tip (iron plated, Longlife)	12
005 40 008 99	6130	Cutting tip	12
005 40 004 99	7250	Copper soldering tip	12



Model	Description	Watt
BP860CEU	Battery powered soldering iron with case	8/11

Butan Gas Operated Soldering Iron and Tips



Order No.	Model	Description
005 16 065 99	WP2	Pyropen Jr.

Battery Powered Soldering Iron

- Fast Heat-Up Battery Powered Soldering Iron.
- The heating element is in the tip for super-fast heat-up.
- Heats up to working temperature in less then 15 seconds.
- Red LED light indicates when power is on.
- Protective safety cap turns off power when placed on tool.
- Over 120 intermittent solder joints with fresh batteries.
- Perfect for field service repair on small parts and components.
- Includes iron, conical tip 0,4 mm, 3 DuraCell AA batteries, lead-free solder and tip wrench.

Weight g	Shelf Pack
179	5

Weller

Spare Tip for Battery Powered Soldering Iron

Packed	Shelf Pack
Carded	6

Dual Battery Powered Soldering Iron with 8 and 11 Watts

- More than 180 solder joints on a single set of four AA alkaline batteries.
- Heats to working temperature in less than 15 seconds.
- Dual heat settings (level I: 8W / 450°C or level II: 11W / 510°C) for ultimate versatility.
- Conical shaped tip 0,8 mm is excellent for close-in work, and chisel shaped tip 1,8 mm.
- Bright white LED illuminates work area.
- Storage cap with auto power shut-off.
- Set includes iron, 2 tips (conical 0,8 mm, chisel shaped 1,8 mm), 4 Duracell® AA batteries, lead-free solder, tip removal wrench and storage case.
- Replacement tips available.

Weight g	Shelf Pack
353	6

Butane Gas Operated Soldering Iron WP2 Pyropen Jr.

- Mini soldering iron and brazing that goes everywhere with temperature control.
- Recharged in seconds.
- This easy-to-handle butane gas operated soldering iron requires no power cord or batteries and is electrically completely neutral (no peaks).
- "Longlife" soldering tips deliver quick heat-up time.
- Temperature control of soldering iron: 200 450°C Hotblow feature: 430°C max., torch feature: 1300°C max. All temperature are approximate.
- Consists of WP2 Pyropen Jr., iron holder, cleaning sponge, tapered needle "Longlife" tip 0,5 mm (71-01-01) and gas-refill.

on	Weight g	Shelf Pack
	245	1

Cordless Soldering Irons & Accessories

Butan Gas Operated Soldering Iron and Tips

Soldering Tips for WP2 Pyropen Jr.

- "Longlife" soldering tips with catalyst.
- All tips are packed on card.









Order No.	Model	Description	Width mm	Shelf Pack
005 16 165 99	71-01-01	Tapered needle	0,5	6
005 16 166 99	71-01-02	Chisel point	3,0	6

Hot Air Tips for WP2 Pyropen Jr.



 "Longlife" hot air tips with catalyst.
All tips are packed on card.

Order No.	Model	Description	Diameter mm	Shelf Pack
005 16 168 99	71-01-50	Hot air nozzle	1,5	6





Butane Gas Operated Soldering Iron WP1 with Piezo Ignition

- This soldering iron, operated using by butane gas, has infinitely variable temperature control.
- Recharged in seconds.
- Easy-to-handle, requires no power cord or batteries and is electronically completely neutral (no peaks).
- "Longlife" soldering tips deliver quick heat-up time.
- It can also be used as a hot air unit for shrinking plastic.
- Consists of gas soldering iron WP1 complete with soldering tip 91-01-01, hot air tip 91-01-52 and closure cap.



Order No.	Model	Description	Weight g	Shelf Pack
005 16 085 99	WP1	Gas soldering iron with piezo ignition	139	6

Cordless Soldering Irons & Accessories

Butan Gas Operated Soldering Iron and Tips



Order No.	Model	Description	Width mm	Shelf Pack
005 16 385 99	91-01-01	Soldering tip needle shaped	1,0	6
005 16 386 99	91-01-02	Soldering tip chisel shaped	2,4	6
005 16 387 99	91-01-03	Soldering tip round shaped bevelled	2,0	6
005 16 388 99	91-01-04	Soldering tip chisel shaped	5,0	6
005 16 389 99	91-01-50	Hot air nozzle, Ø 1,5 mm		6
005 16 390 99	91-01-52	Hot air nozzle, Ø 4,7 mm		6
005 16 391 99	91-07U	Blow torch		6



Order No.	Model	Description	Weight g	Shelf Pack
005 16 084 99	P1K	Gas soldering iron kit	355	6

Soldering Tips, Hot Air Nozzles and Blow Torch for WP1

- All tips and nozzles with catalyst.
- Packed on card.



91-01-50

91-01-52


Butane Gas Operated Soldering Iron Kit Weller/Portasol P1K

- This gas soldering kit has four tools in one: soldering tip, flame nozzle, hot air nozzle and hot cutting knife.
- Operated using butane gas.
- Refillable and can be used anywhere.
- Approx. temperature soldering tips, hot air nozzle and cutting knife: up to 450°C, flame nozzle: up to 1300°C.
- Consists of gas soldering iron with tip T2, flame nozzle T5, hot air nozzle T6, cutting knife T7, cleaning sponge and safety rest in a sturdy storage box.

CE

Cordless Soldering Irons & Accessories

Butan Gas Operated Soldering Iron and Tips





Soldering Tips, Nozzles & Cutting Knife for P1K

All tips and nozzles with catalyst. Packed on card.

Hobbykits & Accessories

Hobbykits for Pokerwork and Stained Glass & Accessories



Order No.	Model	Description	Width mm	Shelf Pack
005 16 303 99	T1	Soldering tip	1,0	6
005 16 304 99	T2	Soldering tip	2,4	6
005 16 308 99	Т6	Hot air nozzle		6
005 16 309 99	T7	Cutting knife		6




Butane Gas Operated Soldering Iron Weller/Portasol WC1

- Operated by using butane gas.
- Refillable and can be used anywhere.
- Consists of gas soldering iron with tip C2 and





Order No.	Model	Description	Weight g	Shelf Pack
005 16 080 99	WC1	Gas soldering iron	85	6



Soldering tips for WC1

- All tips with catalyst.
- Packed on card.

Order No.	Model	Description	Width mm	Shelf Pack
005 16 300 99	C2	Soldering tip chisel shaped	3,0	6
005 16 301 99	C3	Soldering tip fine	0,4	6
005 16 302 99	C4	Cutting knife		6




Butane Gas Powered Soldering Irons Accessory for all Pyropen Soldering Irons

Order No.	Model	Description
005 16 160 99	RB-TS	Butane gas refill canister 75 ml
005 10 100 55	KD-13	butane gas reini canister 75 m

Order No.	Model	Watts	Volts
(VDE)	HK1EU	25	230
	HK1UK	25	230





Order No.	Model	Description	Shelf Pack
005 43 138 99	MT5 / MT9	2 tips, straight 0,8 mm and sloped 50° / 4,0 mm	6
BS10SP	BS10SP	5 stylus points for decorative designs	6
BS11SP	BS11SP	5 stylus points for decorative designs	6
BS12SP	BS12SP	5 stylus points for decorative designs	6



Order No.	Model	Watts	Volts	Hz	Weight g	Shelf Pack
(VDE)	HK2EU	80	230	50	445	6
	HK2UK	80	230	50	455	



Hobbykit 1 for Pokerwork, 25 Watts

- Specially designed for wood, cork, leather burning and candle sculpting.
- Consists of hobby iron, straight tip 0,8 mm and sloped tip 50° / 4,0 mm, tool support and operating instruction.
- ON / OFF indicator light.

RoHS compliant		C	e
-------------------	--	---	---

Hz	Weight g	Shelf Pack
50	388	6
50	398	

Stylus Points and Tips for Hobbykit 1

All stylus points and tips are packed on card.

Hobbykit 2 Stained Glass Soldering Iron, 80 Watts

- A safe hobby iron designed for decorative glass work (Tiffany) around the house, such as lamp shades and glass pictures.
- Consists of hobby iron with tip SG10, tool support and operating instruction.
- ON / OFF indicator light.

RoHS compliant **△**€

Hobbykits & Accessories

Hobbykits for Pokerwork and Stained Glass & Accessories



Soldering Tips for Hobbykit 2

All soldering tips are packed on card.

	and the lotter
	and the second se
	Concession in succession

SG11, WHA30, WHA31

Order No.	Model	Description	Width mm	Shelf Pack
005 43 270 99	SG10	"Longlife" tip, iron-plated, sloped 45°	7,0	6
005 43 272 99	SG11	"Longlife" tip, iron-plated, chisel shaped	5,0	6
005 40 053 99	WHA30	"Longlife" tip, iron-plated, chisel shaped	10,0	6
005 40 054 99	WHA31	"Longlife" tip, iron-plated, chisel shaped	6,0	6

Profikit & Accessories



Temperature Controlled Stained Glass Iron, 100 Watts

- Temperature controlled stained glass iron made to the highest professional standards.
- Temperature is controlled according to the Weller[®] Magnastat Principle.
- The Weller® soldering irons with automatic temperature control guarantee an outstanding heat supply and restrict the energy supply when the tool idles.
- Working temperature: approx. 340°C.
- Idle temperature: approx. 370°C.
- Consists of stained glass iron with tip SG40,
- iron support and operating instruction.

Order No.	Model	Watts	Volts	Hz	Weight g	Shelf Pack
005 62 086 99	Profikit 100	100	230	50	445	1



∕≙€€

RoHS compliant

Soldering Tips for Profikit 100

All soldering tips packed on card.




Soldering Irons for Stained Glass & Accessories





Order No.	Model	Watts	Volts
005 62 096 99	Profikit 200	200	230

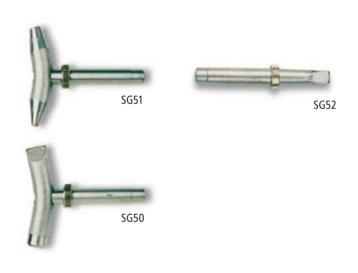

Order No.	Model	Description	Width mm	Shelf Pack
005 40 061 99	SG50/6	"Longlife" tip, iron-plated, hammer shaped, Ø 16 mm		1
005 40 062 99	SG51/6	"Longlife" tip, iron-plated, hammer shaped, Ø 6 mm and 10 n	าท	1
005 40 063 99	SG52/6	"Longlife" tip, iron-plated, chisel shaped, straight	10	1

Order No.	Model	Description	Width mm	Shelf Pack
005 40 057 99	SG40	"Longlife" tip, iron-plated, straight, sloped 45°	7	6
005 40 058 99	SG41	"Longlife" tip, iron-plated, straight, chisel shaped	7	6
005 40 060 99	SG43	"Longlife" tip, iron-plated, bent, chisel shaped	7	6

SG43



Temperature Controlled Stained Glass Iron, 200 Watts

- Temperature controlled stained glass iron made to the highest professional standards.
- Temperature is controlled according to the Weller[®] Magnastat Principle.
- The Weller[®] soldering irons with automatic temperature control guarantee an outstanding heat supply and restrict the energy supply when the tool idles.
- Working temperature: approx. 290°C.
- Idle temperature: approx. 335°C.
- Consists of stained glass iron with hammer soldering tip SG50/6, iron support and operating instruction.

Hz	Weight g	Shelf Pack
50	976	1

Soldering Tips for Profikit 200

- All soldering tips are packed in polybag.
- Tips with Weller[®] Magnastat temperature control for higher temperature on request.

Solder Accessories

Accessories				
Collec		Safety rest KH15 Complete with sponge.		
Order No.	Model	Description Weig	uht a	Shelf Pack
005 15 021 99	KH15	For soldering irons, series Mini 2000 425	,	1
		Safety rest KH30 Complete with sponge.		
Order No. 005 15 040 99	Model KH30	Description Weight For soldering irons up to 100 Watts, 620 Hobbykit 1 and 2 620	gnt g	Shelf Pack 1
-				
Ő		 For all Weller soldering and desoldering tools. Complete with sponge. 		
Order No.	Model	Complete with sponge.		_
005 15 004 99	Model KH 4 KH 6			
Order No. 005 15 004 99 005 15 006 99	KH 4	 Complete with sponge. Description Safety rest for SPI 16/27/41 soldering iron with straight tip Safety rest for SPI 81 soldering iron with straight tip PCB Holder Maximum mounting surface of 160 mm x 235 mm. PCB's and components can be rotated through 360° at increment: Work-piece is held in place by spring clamps. Side pieces are adjustable along a continuum. Hexagonal socket s Built-in, non-slip rubber feet. A firm work surface is assured by a well positioned centre of gravi Moveable arm with cushion grip holds components in place. 	screws hold in place ity and built-in rubb	er feet.
005 15 004 99	KH 4	 Complete with sponge. Description Safety rest for SPI 16/27/41 soldering iron with straight tip Safety rest for SPI 81 soldering iron with straight tip PCB Holder Maximum mounting surface of 160 mm x 235 mm. PCB's and components can be rotated through 360° at increment: Work-piece is held in place by spring clamps. Side pieces are adjustable along a continuum. Hexagonal socket s 	screws hold in place ity and built-in rubb ents, connectors, solo	er feet.
005 15 004 99 005 15 006 99	KH 4 KH 6	 Complete with sponge. Description Safety rest for SPI 16/27/41 soldering iron with straight tip Safety rest for SPI 81 soldering iron with straight tip PCB Holder Maximum mounting surface of 160 mm x 235 mm. PCB's and components can be rotated through 360° at increment: Work-piece is held in place by spring clamps. Side pieces are adjustable along a continuum. Hexagonal socket so Built-in, non-slip rubber feet. A firm work surface is assured by a well positioned centre of gravi Moveable arm with cushion grip holds components in place. Offers many possibilities for attaching different shaped componert 	screws hold in place ity and built-in rubb ents, connectors, solo	er feet. dering strips etc.
005 15 004 99 005 15 006 99	KH 4 KH 6	 Complete with sponge. Description Safety rest for SPI 16/27/41 soldering iron with straight tip Safety rest for SPI 81 soldering iron with straight tip PCB Holder Maximum mounting surface of 160 mm x 235 mm. PCB's and components can be rotated through 360° at increments Work-piece is held in place by spring clamps. Side pieces are adjustable along a continuum. Hexagonal socket s Built-in, non-slip rubber feet. A firm work surface is assured by a well positioned centre of gravi Moveable arm with cushion grip holds components in place. Offers many possibilities for attaching different shaped component Description	screws hold in place rity and built-in rubb ents, connectors, solo ght g	er feet. dering strips etc. Shelf Pack 1
005 15 004 99 005 15 006 99	KH 4 KH 6	Complete with sponge. Description Safety rest for SPI 16/27/41 soldering iron with straight tip Safety rest for SPI 81 soldering iron with straight tip PCB Holder Maximum mounting surface of 160 mm x 235 mm. PCB's and components can be rotated through 360° at increment: Work-piece is held in place by spring clamps. Side pieces are adjustable along a continuum. Hexagonal socket s Built-in, non-slip rubber feet. A firm work surface is assured by a well positioned centre of gravi Moveable arm with cushion grip holds components in place. Offers many possibilities for attaching different shaped componer Description Weigl Board Holder For coils up to 1000 g.	screws hold in place rity and built-in rubb ents, connectors, solo ght g	er feet. dering strips etc. Shelf Pack 1

Solder Accessories

Accessories

Solder, Lead Free, EL99/1

"Lead free" solder S-Sn99Cu1, DIN EN 29453 (Sn99,3Cu0,7). 2,2% resin DIN EN 29454, 1.1.2.B.

A method for the sector of the				
Order No.	Model	Description	Packed	Shelf Pack
005 40 250 99	EL99/1-25	Lead free solder 25 g, Ø 1,0 mm	Carded	6
005 40 251 99	EL99/1-100	Lead free solder 100 g, Ø 1,0 mm	Carded	6
005 40 252 99	EL99/1-250	Lead free solder 250 g, Ø 1,0 mm	Carded	6
Weller -		Solder RL 60/40-100		
-	New York	L-Sn 60 PbCu 2/zh.		
1,5	0,1	DIN 8516, F-SW 26.		
Am Single Culture Constant Santa	Ŧ			
Order No.	Model	Description	Packed	Shelf Pack
005 40 025 99	RL 60/40-100	Solder with a resin-core, 100 g, Ø 1,5 mm	Carded	6
1,5 C-Sn40PbCD/2 Din 85%,F-SW 2 Filt - Lease 4	0.250 N	Solder RL 60/40-250 L-Sn 60 PbCu 2/zh. DIN 8516, F-SW 26.		
Order No. 005 40 042 99	Model RL 60/40-250	Description Solder with resin-core , 250 g, Ø 1,5 mm	Packed Carded	Shelf Pack 6
Elektronido	0.025	Solder RL 60/40-250		
-		DIN 8516 F-SW 26		

A sensitive the left well.				
Order No.	Model	Description	Packed	Shelf Pack
005 40 250 99	EL99/1-25	Lead free solder 25 g, Ø 1,0 mm	Carded	6
005 40 251 99	EL99/1-100	Lead free solder 100 g, Ø 1,0 mm	Carded	6
005 40 252 99	EL99/1-250	Lead free solder 250 g, Ø 1,0 mm	Carded	6
Radioot 1,5 Distribution Distribution Construction Constr	arr 0,1	Solder RL 60/40-100 L-Sn 60 PbCu 2/zh. DIN 8516, F-SW 26.		
Order No. 005 40 025 99	Model RL 60/40-100	Description Solder with a resin-core, 100 g, Ø 1,5 mm	Packed Carded	Shelf Pack 6
S 40042 00 Radiolog 1,5 U-SmGPDCD2/ Din 85%, F-SW 2 Hitr concert	0.250 Y	Solder RL 60/40-250 L-Sn 60 PbCu 2/zh. DIN 8516, F-SW 26.		
Order No. 005 40 042 99	Model RL 60/40-250	Description Solder with resin-core , 250 g, Ø 1,5 mm	Packed Carded	Shelf Pack 6
Electronide	0.025	Solder RL 60/40-250 L-Sn 60 PbCu 2/zh. DIN 8516 E-SW 26		



\sim				
Order No.	Model	Description	Packed	Shelf Pack
005 40 250 99	EL99/1-25	Lead free solder 25 g, Ø 1,0 mm	Carded	6
005 40 251 99	EL99/1-100	Lead free solder 100 g, Ø 1,0 mm	Carded	6
005 40 252 99	EL99/1-250	Lead free solder 250 g, Ø 1,0 mm	Carded	6
Weller ~		Solder RL 60/40-100		
-	and the second s	L-Sn 60 PbCu 2/zh.		
1,5	0.1	DIN 8516, F-SW 26.		
London Poular London Poular Marcane	Ŧ			
	Model	Description	Packed	Shelf Pack
	Model RL 60/40-100	Description Solder with a resin-core, 100 g, Ø 1,5 mm	Packed Carded	Shelf Pack
Order No. 005 40 025 99	RL 60/40-100			
005 40 025 99	RL 60/40-100	Solder with a resin-core, 100 g, Ø 1,5 mm Solder RL 60/40-250 L-Sn 60 PbCu 2/zh.		

Lesitropiliot		Solder RL 60/40-250 = L-Sn 60 PbCu 2/zh. = DIN 8516, F-SW 26.		
Order No.	Model	Description	Packed	Shelf Pack
005 40 029 99	L 60/40-25	Solder with resin-core, 25 g, Ø 1 mm on reel	Carded	6



EUPERIOR LEAD FREE PERFORMANCE

Solder Accessories

Accessories Electronic Solder EL 60/40-100 L-Sn 60 PbCu 2/zh. DIN 8516, F-SW 26. Order No. Model Description Packed 005 40 045 99 EL 60/40-100 Electronic solder with resin-core, 100 g, Ø 1 mm Carded Veller Soldering Grease LF 25 Lötfett DIN 8511, F-SW 21. Model Description Packed Order No. 005 40 026 99 LF 25 Soldering grease, 20 g Carded **Solder Solution LW 25** DIN 8511, F-SW 12. Weller Stwasser Barnes 25-Market Street Str and Sri 2, D-24014 Besight Order No. Model Description Packed 005 40 027 99 LW 25 Solder solution, approx. 25 ml. Carded Tiffany Solder TL 60/40-100

L-Sn 60 Pb (Sb)/zh. EN 29453.

Order No.	Model	Description	Packed	Shelf Pack
005 40 090 99	TL 60/40-100	Solder, 100 g, Ø 3 mm, for Tiffany work	Carded	6

Solder Accessories

Accessories

Shelf Pack

Shelf Pack

Shelf Pack

Solder Assortment WLS 20-65 ■ 1 Solder Wire, 20 g, Ø 1,5 mm. L-Sn 50 PbCu/zh, DIN 8516, F-SW 26. 1 Stone 65 x 45 x 20 mm, Ammonium chloride. 1 Solder solution DIN 8511, F-SW 12. ■ 1 Solder grease DIN 8511, F-SW 21.

Order No.	Model	Description
005 40 094 99	WLS 20-65	Solder assortment

Desoldering Wires

Order No. Description 005 13 010 99 Desoldering wire 1,6 m coil, width 1,5 mm 005 13 011 99 Desoldering wire 1,6 m coil, width 2 mm 005 13 012 99 Desoldering wire 1,6 m coil, width 2,5 mm

Flux Pen

Order No.

Description 005 13 830 99 Flux Pen

	with the second	Flux Pen
**	- TINING - M	Liquid flux with brush
Order No.		Description
005 13 829 99		Flux Pen

Weller

Packed	Shelf Pack
Carded	6

The desoldering wire consists of a copper net with flux F-SW32. The special surface treatment allows efficient solder removal.

For easy and exact application of flux, eliminating the mess from flux bottles. The spring loaded tip dispenses just the right amount of flux to the soldering joint. Body and function like a text marker. Content 10 cm³, Halogen-free, not refillable.

Flux type 1.1.3.A (F-SW32), EN29 454, contents 9,5 ml.

sh, 25 ml

Solder Accessories

Accessories



Vacuum Pen

For easy pick and place of delicate SMD components.

- The vacuum pen avoids stress and damages to the leads.
- The versatile compact sized pen is independent from compressed air or batteries.

Order No.	Model	Description
WLSK200	WLSK 200	Vacuum pen
Accessory:		
WLSK200T18	WLSKT 18	Replacement with tip, rubber 3,2 mm
WLSK200T38	WLSKT 38	Replacement with tip, rubber 9,5 mm
KDS260S	KDS 260S	Replacement rubber 3,2 mm
KDS260L	KDS 260L	Replacement rubber 9,5 mm

Sponge for Safty rests

Order No.	Description
005 22 419 99	Surrogate sponges (5 pcs.)



Desoldering Pump

- With the hand-held desoldering pumps a vacuum is produced by means of a piston, cylinder and spring force.
- The piston is tensioned manually and secured automatically.
- The piston is moved back suddenly by pressing the release button and a vacuum is created briefly so that the soldered joint is freed of liquid solder.

Order No.	Model	Description	Packed	Shelf Pack
005 40 110 99	DSP11	Desoldering pump	Carded	6



Desoldering Pump

- With the hand-held desoldering pumps a vacuum is produced by means of a piston, cylinder and spring force.
- The piston is tensioned manually and secured automatically.
- The piston is moved back suddenly by pressing the release button and a vacuum is created briefly so that the soldered joint is freed of liquid solder.

Order No.	Model	Description
SA21A	SA 21A	Manual desoldering pump
		Length 200 mm, Metal housing,
		antistatic
Accessory:		
SA21A1	SA 21A1	Desoldering tip antistatic for SA 21A

Solder Accessories

Accessories



- march

- These oxides must be removed regularly otherwise it will make the tip completely unwettable and not usable anymore.
- When cleaning the tip by means of the Weller WDC Dry Cleaner a special metal wool is used.
- First the surplus solder is removed by tapping the tip on the soft edge of the collector box.
- of the iron layer which is an advantage versus the cleaning by the wet sponge.
- The final cleaning is then done by pushing and turning the tip in the metal wool. After cleaning there is still a fine rest of solder on the tip avoiding fast oxidation The metal wool can be soaked in flux which may improve even the performance.

Tip Activator

Order N 005 13 0

Stainless Steel Brush

- Pack of 3
- Order M 005 13 8

Polishing Bar

Order N WPB1





Weller WDC - Dry Cleaner The solution for cleaning from lead free solder!

When using lead free it will be experienced an increased oxidation in the wettable area of the tip.

lo.	Model	Description
124 99	WDC	Weller WDC dry cleaner, antistatic
ory:		
324 99		Metal wool WDC replacement (2 pieces)

The Weller Tip Activator for regeneration of oxidzed tips works fast and easy with low temperature.

- The Tip Activator is environmentally safe and contains no halides, lead, rosin or residue.
- Regular us will prolong the life time o the tips. 43 g. Packaging unit 6 pcs.

lo.	Description
031 99	Tip Activator

For cleaning tips in hot conditions

No.	Description
827 99	Stainless steel wire brush

Cleaning only possible in cold state of the soldering tip

lo.	Description
	Grindstone for removal of compact oxid films

EROP Cutters & Pliers

EROP Cutters & Pliers

Side Cutters

Order No./ Mod EROP355
EROP155
EROP419
EROP357

Order No./ Model	Description
EROP355	Side cutter, semi flush cut, burnished, ESD safe, max. Cu 1,0 mm, 110 mm, 61 g
EROP155	Side cutter, semi flush cut, burnished, ESD safe, max. Cu 1,0 mm, 110 mm, 72 g
EROP419	Side cutter, semi flush cut, burnished, ESD safe, max. Cu 2,0 mm, 130 mm, 110 g
EROP357	Side cutter, semi flush cut, burnished, ESD safe, max. Cu 0,6 mm, 110 mm, 61 g

Tip Cutters



Order No./ Model	Description
EROP331	Tip cutter, flush cut, burnished, ESD safe, max. Cu 1,5 mm, 120 mm, 81 g
EROP330	Tip cutter, flush cut, burnished, ESD safe, max. Cu 1,0 mm, 130 mm, 84 g

EROP Cutters & Pliers

EROP Cutters & Pliers

Pliers	
Order No./ Model	Description
EROP172	Round nose plier, burnished, ESD safe, 125 mm, 63 g
EROP174	Needle nose plier, burnished, ESD safe, 120mm, 66g
EROP277	Needle nose plier, burnished, ESD safe, 140 mm, 90 g
EROP280	Needle nose plier, burnished, ESD safe, 170 mm, 113 g
EROP170	Flat nose plier, burnished, ESD safe, 120 mm, 63 g
EROP171	Flat nose plier, burnished, ESD safe, 120 mm, 67 g



Shearcutter, Snip, Wire Stripper and Tweezers



Shearcutter – general purpose

Cutting copper wire to 0,8 mm diameter.

		Size		
Order No./ Model	Description	Inch	mm	
170M	Shearcutter, red handles	5	127	
175M	Shearcutter with safety clips, red handles	5	127	

Xcelite[®]



Sheet metal Snip

		Size	
Order No./ Model	Description	Inch	mm
86CG	Snip, electronic	6 1/2	165



Wire Stripper & Cutters

		Siz	e	
Order No./ Model	Description	Inch	mm	
100X	Wire Stripper & Cutter, adjustable	5	127	
1015	Wire Stripper & Cutter, spring-opening	5	127	



		Size
Order No./ Model	Description	Inch mm
SMD20SA	CMS Tweezers with 30°	4,5 115
	angle for small chips	

CMS Tweezers

CMS Tweezers



		Size	
Order No./ Model	Description	Inch	mm
SMD21SA	CMS Tweezers with 20°	4,5	115
	angle for SOT components		

Shearcutters & Tweezers

Tweezers



Pointed Tips Straight Relieved

Order No./ Model
5ASASL

7SASL

Flat Round Tips Straight

Order No./ Model 2ASASL



Description
Precision tweezers, special stainless steel, non-magnetic, with shorter tips, 110 mm, 11 g
Precision tweezers, special stainless steel, non-magnetic, thicker tips, 120 mm, 14 g
Precision tweezers, special stainless steel, non-magnetic, flat inside tips, very resistant, 120 mm, 14 g
Precision tweezers, Nickel plated, 120 mm, 16 g
Precision tweezers, special stainless steel, non-magnetic, 125 mm, 16 g
Precision tweezers reverse action, with fibre-grip handles, special stainless steel, non-magnetic, 150 mm, 26 g
Precision tweezers, with very fine tips, special stainless steel, non-magnetic, 115 mm, 12 g, economy model

"SA" in the order-no signifies: Unmagnetic, rust resistant, anti acid alloy, temp. resistant up to 300°C

Description
Precision tweezers with fine tips, oblique 15°, special stainless steel, non-magnetic,
115 mm, 12 g

Precision tweezers with fine tips, curved, special stainless steel, non-magnetic, relieved, 120 mm, 15 g


Description
Precision tweezers, special stainless steel, non-magnetic, with medium round tips
for gripping, tip side 2 mm, 120 mm, 15 g

Pliers, 1000 Volts Insulated

Pliers, 1000 Volts Insulated

Screwdrivers, 1000 Volts Insulated

Screwdrivers, 1000 Volts Insulated

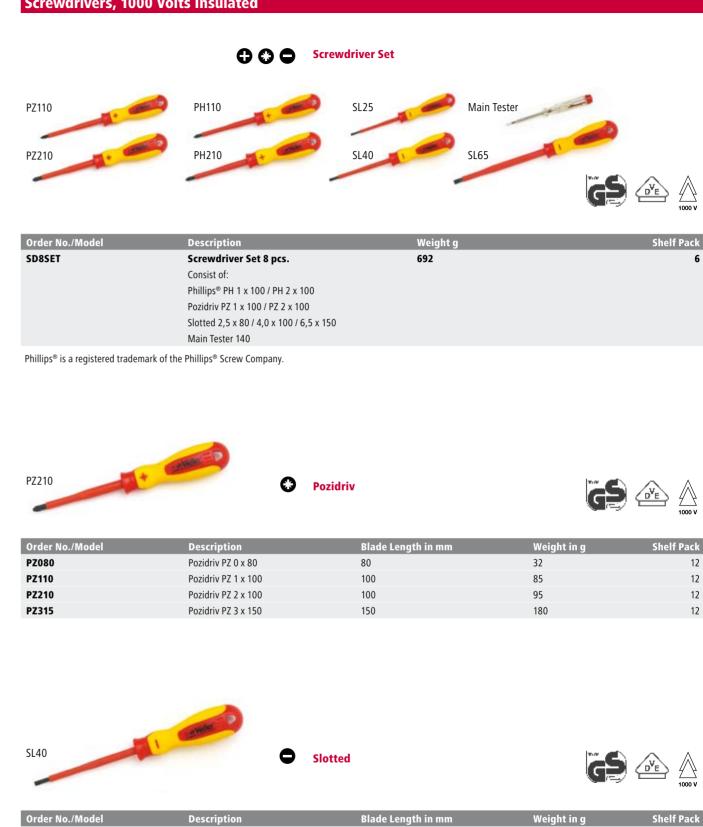

Order No./Model	Description	Blade Length in mm	Weight in g	Shelf Pack
SL25	Slotted 2,5 x 0,4 x 80	80	32	12
SL40	Slotted 4,0 x 0,8 x 100	100	58	12
SL65	Slotted 6,5 x 1,2 x 150	150	117	12


	 Insulated according Norm 1000 V 05 IEC 60900: 2004. VDE / GS certificated. Co-molded handles for maximum comfort. 				
	Order No./Model	Description	Length mm	Weight g	Shelf Pack
- And a state of the state of t	CP180	Combination Pliers	180	301	6
	DCN160	Diagonal Cutting Nipper	160	243	6

High Leverage Diagonal Cutting Nipper

256



HLDCN160

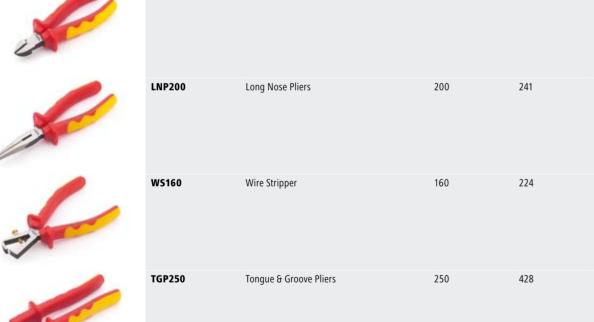

160

Weller®

Weight g	Shelf Pack
692	6

Blade Length in mm	Weight in g	Shelf Pack
80	32	12
100	85	12
100	95	12
150	180	12

Screwdriver & Nutdriver Sets

Order No.

Screwdriver & Nutdriver Sets



Mini Screwdriver Set with Slotted/Phillips Screwdrivers

Description

M60 Mini Screwdriver Set with Slotted/Phillips Screwdrivers (7 pcs.)



Screwdriver & Nutdriver Sets

Allen Hex Type Screwdriver Set

Order No.	Description
99PS41MM	Allen Hex Type Screwdriver Set – Metric Size
consists of:	
991X	Regular Handle
99X5	Extension 4"
9971MM	Blade, Screwdriver, Allen Hex Type, 1,27 mm
9972MM	Blade, Screwdriver, Allen Hex Type, 1,5 mm
9973MM	Blade, Screwdriver, Allen Hex Type, 2 mm
9974MM	Blade, Screwdriver, Allen Hex Type, 2,5 mm
9975MM	Blade, Screwdriver, Allen Hex Type, 3 mm
9976MM	Blade, Screwdriver, Allen Hex Type, 4 mm
9977MM	Blade, Screwdriver, Allen Hex Type, 5 mm

Compact Convertible Hex Socket Srewdriver Set – Metric Size

	FIL	T.	11		-
13.4	THE	- H		17	No.
-	H	Te	99		j

Order No.	Description Length		th
		Inch	mm
PS90MM	Compact Convertible Hex Socket Srewdriver Set – Metric Size		
consists of:			
P71	Screwdriver, Midget, Hex, 1,27 mm	3 1/2	89
P72	Screwdriver, Midget, Hex, 1,5 mm	3 1/2	89
P73	Screwdriver, Midget, Hex, 0,89 mm	3 1/2	89
P74	Screwdriver, Midget, Hex, 2,5 mm	3 1/2	89
P75	Screwdriver, Midget, Hex, 3 mm	3 1/2	89
P76	Screwdriver, Midget, Hex, 4 mm	3 1/2	89
P77	Screwdriver, Midget, Hex, 5 mm	3 1/2	89
P78	Screwdriver, Midget, Hex, 0,89 mm	3 1/2	89
TA2	Torque amplifier handle, black	3 1/2	89

Compact Convertible Nutdriver Set – Metric Sizes



Order No.	Description	Leng	yth
		Inch	mm
PS121MM	Compact Convertible Nutdriver Set – Metric Size		
consists of:			
P3MM	Nutdriver, Midget, 3 mm (0,118")	3 1/2	89
P35MM	Nutdriver, Midget, 3,5 mm (0,138")	3 1/2	89
P4MM	Nutdriver, Midget, 4 mm (0,157")	3 1/2	89
P45MM	Nutdriver, Midget, 4,5 mm (0,177")	3 1/2	89
P5MM	Nutdriver, Midget, 5 mm (0,197")	3 1/2	89
P55MM	Nutdriver, Midget, 5,5 mm (0,217")	3 1/2	89
P6MM	Nutdriver, Midget, 6 mm (0,236")	3 1/2	89
P7MM	Nutdriver, Midget, 7 mm (0,276")	3 1/2	89
P8MM	Nutdriver, Midget, 8 mm (0,315")	3 1/2	89
P10MM	Nutdriver, Midget, 10 mm (0,394")		
TA2	Torque amplifier handle, black		



Ord 991 cor 991

Order No.	Description
99PS51MM	Interchangeable Shank, Nutdriver Set – Metric Size
consists of:	
991X	Regular Handle
99X5	Extension 4"
994MM	Blade, Nutdriver, 4 mm
9945MM	Blade, Nutdriver, 4,5 mm
995MM	Blade, Nutdriver, 5 mm
9955MM	Blade, Nutdriver, 5,5 mm
996MM	Blade, Nutdriver, 6 mm
997MM	Blade, Nutdriver, 7 mm
998MM	Blade, Nutdriver, 8 mm
999MM	Blade, Nutdriver, 9 mm
9910MM	Blade, Nutdriver, 10 mm
9911MM	Blade, Nutdriver, 11 mm

Torx Screwdriver Tool Set

Order No.	Description
99XTD7	Torx Screwdriver Tool Set
consists of:	
991X	Regular Handle
9910XTD	Torx Blade No. 10
9915XTD	Torx Blade No. 15
9920XTD	Torx Blade No. 20
9925XTD	Torx Blade No. 25
9927XTD	Torx Blade No. 27
9930XTD	Torx Blade No. 30
9930XTD	Torx Blade No. 30



Interchangeable Shank, Nutdriver Set – Metric Size

Knives & Blades

Knives



		Size	Size	
Order No.	Description	Inch	mm	
XN100	Knife, Light duty for soft material	5 13/16	148	

Xcelite[®]



		Size	
Order No.	Description	Inch	mm
XN200	Knife, Medium duty for hard material	5 3/4	146



		Size	
Order No.	Description	Inch	mm
XN210	Knife, Heavy duty plastic handle for coars jobs	5 7/16	137



Order No. Description XNS100 Light and medium duty knife set contains 10 assorted blades: XN100, XN200, XNB103 (2 pcs.), XNB105 (2 pcs.), XNB101, XNB203, XNB205 (2 pcs.), XNB201

Blades for XN100



Order No.	Description	Pack quantity
XNB101	Blade, standard	5
XNB103	Blade, fine pointed	5
XNB103B	Blade, fine pointed	100
XNB105	Blade, stencil	5

Blades for XN200 and XN210



Tool Sets

Tool Sets



Order No.		Description
CTK45EU		1/4" Tool Set, 45 pieces
		Contents:
	1	1/4" Quick Release Ratcheting Drive, 72-tooth, with ergonom
:	2	1/4" Extension 50 mm und 100 mm, CrV
	1	1/4" Universal Joint, CrV
	1	1/4" Flexible Extension Shaft 150 mm, CrV
	13	1/4" SuperLock Sockets: 4 / 4,5 / 5 / 5,5 / 6 / 7 / 8 / 9 / 10 / 11
:	2	1/4" Phillips® Bit Sockets: No. 1 & No. 2
:	2	1/4" Pozidriv [®] Bit Sockets: No. 1 & No. 2
:	3	1/4" Slotted Bit Sockets: 4, 5, 7 mm
	4	1/4" Hex Bits Sockets: 3, 4, 5, 6 mm
(6	1/4" Torx [®] Bit Sockets: T8, T10, T15, T20, T25, T30
;	8	Hex Key: 1,5 / 2 / 2,5 / 3 / 4 / 5 / 5,5 / 6 mm with holder
	1	1/4" Spinner Handle
	1	1/4" Sliding T-Handle
	1	Case

Crescent[®]

1/4" Tool Set with 45 Tools

- The Set includes 45 pieces in high-quality Chrome-Vanadium and SuperLock (except bits and Hex Keys).
- All pieces are fixed in a handy plastic case.
- Sockets, matte, in Chrome-Vanadium and SuperLock-Quality.



Tool	weight	in	g
1300			

omic cushion grip, CrV

11 / 12 / 13 / 14 mm, CrV

Shelf Pack

Tool Sets

Tool Sets

3/8" + 1/4" Tool Set with 88 Tools

- The Set includes 88 pieces in high Chrome-Vanadium and Flank-Drive-Quality.
- All pieces are fixed in a handy plastic case with carrying handle.

Crescent[®]

- Sockets in Chrome-Vanadium-Quality and Flank-Drive.
- Pliers with co-molded handle, Chrome-Nickel-Steel-Quality.



Order No.		Description	Tool weight in g	Shelf Pack
CTK88EU		3/8" + 1/4" Tool Set, 88 Pieces	5400	3
		Contents:		
	1	3/8" Quick Release Ratcheting Drive, 72-tooth, wi	th ergonomic cushion grip, CrV	
	1	3/8" Extension, 75 mm, CrV		
	1	3/8" Extension, 150 mm, CrV		
	1	3/8" Universal Joint, CrV		
	1	3/8" Sliding T-Handle, 200 mm, CrV		
	16	3/8" Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 1		
	1	3/8" Spark Plug Sockets, 16 mm with rubber lining		
	1	3/8" Spark Plug Sockets, 18 mm with rubber lining	j, CrV	
	1	1/4" Spinner Handle, 175 mm, CrV		
	1	1/4" Flexible Extension Bar, 150 mm, CrV		
	7	1/4" Sockets 4 / 4,5 / 5 / 5,5 / 6 / 7 / 8 mm, CrV		
	1	Socket Converter, 1/2" to 3/8", CrV		
	1	Socket Converter, 3/8" to 1/4", CrV		
	1	Adapter, 3/8" to 1/4", CrV		
	1	Magnetic Bit Driver, 125 mm, CrV		
	1	Magnetic Bit Driver, 50 mm, CrV		
	8	Hex Key 1,5 / 2 / 2,5 / 3 / 4 / 5 / 5,5 / 6 mm with Ho	lder	
	40	Bit Sockets 1/4", 25 mm (PZ, PH, Slotted, Square, 7	fri Wing, Hex, Torx TR, 2 Adapter)	
	1	Tongue and Groove Plier, 200 mm, with co-molded	d handle, CrNi	
	1	Diagonal Side Cutter, 150 mm, with co-molded ha	ndle, CrNi	
	1	Combination Plier, 175 mm, with co-molded hand	le, CrNi	
	1	Case with blister inlay		

Snips & Shears

Snips & Shears



Order No.	Model	Packed	Cuts Metal Sheet up to mm	Length mm	Weight g	Shelf Pack
007 35 000 15	G21	Carded	0,5	190	135	6



Order No.	Model	Packed
007 35 000 45	G22	Carded



Order No.	Packed
WEZSNIP	Carded



Order No.	Packed
WHCS2	Carded



Multi Purpose Snips

- Blades made of stainless special steel.
- For cutting fine metal sheets, paper, fabrics, plastic, wire, leather, flowers etc.

Cable Shear

- Blades made of stainless special steel.
- For soft cables up to 10 mm.

Length mm	Weight g	Shelf Pack
160	128	6

Cable Shear

- Spring-loaded blades for reduced fatigue on repeated cuts.
- Soft-touch co-molded handles for maximum comfort.
- 420 Stainless blades provide maximum corrosion resistance.
- Wire cutter notch for easy cutting of light-gauge wire.
- Safety-latch locks blades closed for storage.
- Heavy-duty design is perfect for shop, garden, and craft cutting jobs.

Length mm	Weight g	Shelf Pack
216	150	4

Cable Shear

- Soft comfort grips with oversize high-leverage bottom ring.
- Stainless steel blades for corrosion resistance.
- Adjustable pivot allows fine-tuning to most comfortable setting.
- Straight blades can be easily re-sharpened.
- Cuts paper, fabric, cardboard, craft materials, and more.
- 130 mm and 200 mm combination set is great for sewing and crafts.

Length mm	Weight g	Shelf Pack
130 + 200	200	4

Swiss Pattern Files

Needle Files

and the second second			5806
	-	AVIN	Monta
	-	1107	9672
	_	wasa.	10000
	-		10000
the second second second second	-		
and the second s	-		- Coloria
and the second s	1		50000
	-		
AND ADDRESS OF ADDRESS			

Used primarily by jewellers, die makers, watchmakers and fine toolmakers. With round, knurled handles.

Nicholson™

Assortments of 12 Shapes Packed in Protective Pouch

Leng	th										
Inch	mm	Order	r No.		Cut No.		Weight pe	r doz. g			Shelf Pack
6 1/4	160	001 44	4 706 02		2		150				1
			Length mm	A x B mm				11.	Length mm	A x B mm	
	Pillar		160	5,4 x 1,2			Knife		160	5,4 x 1,5	
								TITTI			
	Halfround		160	5,6 x 1,7		ŀ	Hand =		160	5,4 x 1,2	
								*			
	Crossing		160	5,1 x 2,0		1	Threesquare	J. L.	160	3,8	
			Length mm	A x B mm					Length mm	A x B mm	
	C		100	2.4			little e		100	61.21	
	Square		160	2,4		2	Slitting		160	6,1 x 2,1	
	Round	JULL CALL	160	2,9		J	oint File		160	5,4 x 1,3	
	Barrette		160	5,1 x 1,8		H	Halfround, cut		160	5,6 x 1,8	

Assortments of 6 Shapes Packed in Protective Plastic Pouch

Len	gth						
Inch	mm	Order N	lo.	Cut No.	Weight	per doz. g	Shelf Pack
6 1/4	160	001 44 7	/06 02	2	65		1
	Pillar Halfround		Hand Threesquare		Square Round		

Manual Wrapping Hand Tools

Manual Wrapping Hand Tools



Order No./ Model	Description
WRAP3F30	Universal Manual Wrapping Tool, AWG 30, Te
WRAPECOMAXI	Manual Wrapping Tool, AWG 20, Terminal ma
WRAPECOMIDI	Manual Wrapping Tool, AWG 26-22, Termina
WRAPECOMINI	Manual Wrapping Tool, AWG 30-24, Termina



Terminal 0,95 x 0,95 nax. 1,34 x 1,34 al max. 1,34 x 1,34 al max. 0,95 x 0,95

G R E A T B R I T A I N **Cooper Tools** A Division of Cooper (GB) Ltd. 4th Floor Pennine House Washington, Tyne & Wear NE37 1LY Tel: (0191) 419 7700 Fax: (0191) 417 9421

FRANCE

Cooper Tools S.A.S. 25 Rue Maurice Chevalier BP 46 77832 Ozoir-la-Ferrière Cedex Tel: (01) 60.18.55.40 Fax: (01) 64.40.33.05

ΙΤΑΙΥ

Cooper Italia S.r.I. Viale Europa 80 20090 Cusago (MI) Tel: (02) 9033101 Fax: (02) 90394231

SWITZERLAND

Erem S.A. Rue de la Roselière 8 1400 Yverdon-les-Bains Tel: (024) 426 12 06 Fax: (024) 425 09 77

THE NETHERLANDS

Cooper Tools B.V. Phileas Foggstraat 16 7821 AK Emmen Drenthe Tel: (0591) 66 75 00 Fax: (0591) 66 75 95

D	istributed by:				

www.cooperhandtools.com/europe www.weller.eu



005 57 157 00 / 03.08 HOL 1.0